


- 1. Remove the original bush from the wishbone including its outer shell.
- 2. Clean any dirt or corrosion from the bore of the arm, using a rounded file to remove any sharp edges.
- 3. Place the washer with the larger bore on the wishbone pin first, and let it sit flush with the arm at the base of the pin.
- 4. Insert the two polyurethane bushes into the vacant hole of the bracket until flush.
- 5. Insert the sleeve into the void of the polyurethane bushes and line up the bore of the sleeve with the pin.
- 6. Fit the washer with the smaller bore onto the end of the assembly followed by refitting the original nut and washer.
- 7. Tension all hardware to manufacturers recommended torque settings.

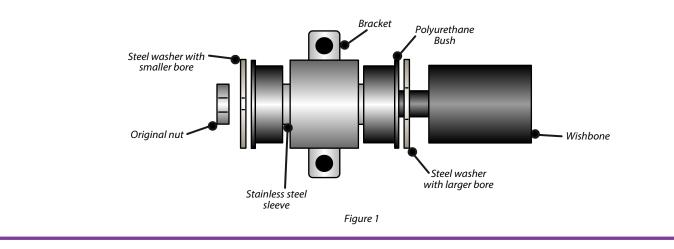

sales@powerflex.co.uk

POWERFLEX

www.powerflex.co.uk