

**PART NUMBER** 

# PFR16-710

**DESCRIPTION** 

### **REAR BEAM MOUNTING BUSH**

### **INSTALLATION GUIDE**

## Contents (parts per pack):

2 x Polyurethane Bushes 1 x Grease

2 x Stainless Steel Sleeves

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.

# SAFETY PERFORMANCE ance Bust

# **Fitting Instructions:**

- 1. Remove the original bush from the rear beam mount.
- 2. Clean any dirt and corrosion from the bore in the arm. Remove any sharp edges from the bore of the rear beam mount.
- 3. Insert bushes into arm with larger diameter lip face facing towards centre of car.
- 4. Apply grease into bore of the bushes.
- 5. Fit sleeve into bush.
- 6. Refit rear beam mount and Tension all hardware to manufacturers recommended torque settings.

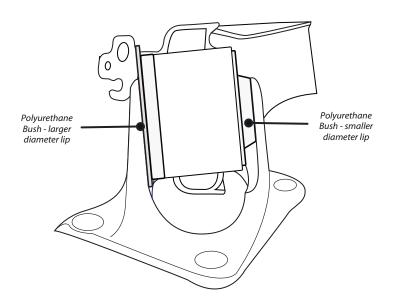


Figure 1 - diagram showing how the bush will fit inside the rear beam mount

POWERFLEX +44 (0) 1895 460033 sales@powerflex.co.uk www.powerflex.co.uk