

PART NUMBER

PFR19-909

DESCRIPTION

REAR TRAILING ARM FRONT BUSH/REAR UPPER FRONT ARM OUTER BUSH

INSTALLATION GUIDE

Contents (parts per pack):

4 x Polyurethane Bushes 1 x PTFE/Silicone Grease

2 x Stainless Steel Sleeves 2 x Outer Shells

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.



Fitting Instructions:

- 1. Remove the original bush including its outer shell from the arm.
- 2. Clean any dirt and corrosion from the bore in the arm. Remove any sharp edges with a rounded file.
- 3. Press the outer shell into the arm, until sitting flush to the face of the arm. The narrower side should face the arm to ease the fitting (fig 1).
- 4. Push the polyurethane bushes in from both sides. See figure 1.
- 5. Apply the provided grease to the bore and the mounting faces of each bush.
- 6. Fit the stainless steel sleeve into the bushes.
- 7. Tension all hardware to manufacturers recommended torque settings.

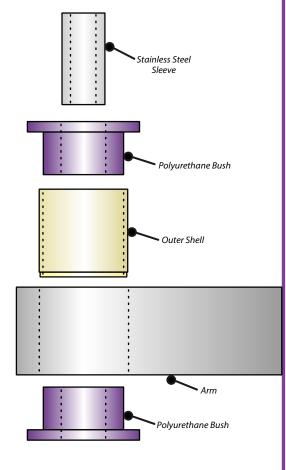


Figure 1