

PFR69-124

DESCRIPTION

REAR SUBFRAME BUSH - RIGHT HAND SIDE

INSTALLATION GUIDE

Contents (parts per pack):

1 x Polyurethane A Bush

1 x PTFE/Silicone Grease

- 1 x Polyurethane B Bush
- 1 x Stainless Steel Sleeves

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.



Fitting Instructions:

- 1. Remove the original rubber bush from the right hand side rear subframe.
- 2. Clean any dirt and corrosion from the bore of the arm, and file off any sharp edges.
- 3. The polyurethane part with the marking PFR69-124A is the thicker upper bush. Push this bush into the bore of the arm from the top.
- 4. The polyurethane part marked PFR69-124B is the thinner lower bush. Push this bush into the bore of the arm from below.
- 5. Re-position the subframe.
- 6. Apply some of the supplied grease to the bore of the polyurethane parts, and push in the stainless sleeve sleeve so it sits flush.
- 7. Reassemble the subframe using the original parts and tension all hardware to manufacturers recommended torque settings.

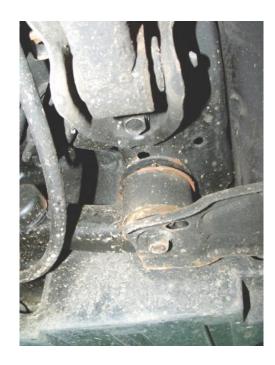


Figure 1. Original Rear Subframe Mount

POWERFLEX +44 (0) 1895 460033 sales@powerflex.co.uk www.powerflex.co.uk