

PFR88-603

DESCRIPTION

REAR SUBFRAME REAR MOUNTING BUSH

INSTALLATION GUIDE

Contents (parts per pack):

4 x Polyurethane Bushes

1 x PTFE/Silicone Grease

2 x Stainless Steel Sleeves


Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:

- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.

(LODITARELES)

Fitting Instructions:

- 1. Remove the original rubber bush from the rear subframe rear position.
- 2. Clean any dirt and corrosion from the bore of the subframe and file off any sharp edges.
- 3. Fit one polyurethane bush into the subframe from the upper chassis side.
- 4. Fit another polyurethane bush into the subframe from the lower road side.
- 5. Apply the supplied grease into the bore of the polyurethane bush and the upper and lower faces of the bush.
- 6. Insert the stainless steel sleeve into the polyurethane bush so that it sits flush.
- 7. Refit the subframe back to the vehicle, using the original bolt and washer and tension all hardware to manufacturers recommended torque settings.

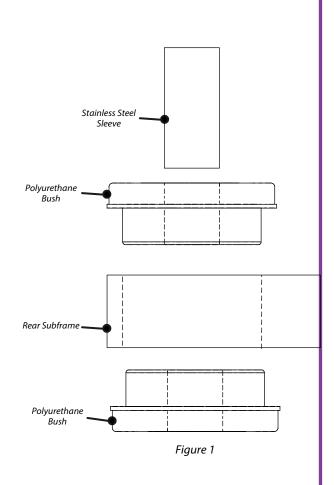

POWERFLEX +44 (0) 1895 460033 sales@powerflex.co.uk www.powerflex.co.uk